

ROYAL BLINDS  رويال بلايندز

COMPANY PROFILE

ESTABLISHED IN 1989, Royal Blinds has provided the very highest quality blinds throughout the Middle East for over 20 years, earning a reputation as the leading name in blind design, manufacturing and installation in the region.

Royal Blinds are committed to delivering over and above our client's expectations; whether it's a large scale refit or one off bespoke item; we guarantee to deliver on time and at a competitive price.

More than just a supplier, Royal Blinds is proud to offer a complete specialist service to all of our clients from technical design and consultation to in house fabrication and installation of your made to measure blinds on site.

We are happy to deliver and install anywhere in the UAE, Oman, Qatar, Bahrain, Saudi Arabia and Kuwait.

QUALITY & CHOICE:

Royal Blinds manufactures and supplies every major style of blind, curtain, shutter, awning and canopy. We source only the finest quality materials and deal with a select group of trusted international suppliers, all of whom are ISO certified with the highest technical capability.

Our dedicated 124,800 square metre production centre based in the creative hub of Al Quoz, Dubai allows us to ensure a speedy turn around from order to delivery and means that quality control is second to none.

CUSTOMER SERVICE:

Recognized as the best, respected in the industry and renowned for our work; Royal Blinds is known for the very highest levels of customer service.

With over 100 team members, our friendly, knowledgeable and experienced staff are always on hand to assist and advise you at every stage of the process, and are never more than a phone call away.

The Royal Blinds team has an excellent knowledge and understanding of the demands of your industry and a passion for excellence that matches your own. We regularly work with architects and designers to create bespoke systems to suit unique installations, providing you with innovative and unique solutions.



THE PREFERRED CHOICE

Royal Blinds is proud to be a preferred supplier to many of the region's leading property development companies and contractors and we also provide regular consultations to high profile architecture and design firms.

With a flair for creating stunning yet practical blinds to the highest specifications; whatever the job, Royal Blinds can create the right design for you.

We would be delighted to show you why we are the number one choice in the Middle East for:

Venetian Blinds

Wooden Blinds

Vertical Blinds

Panel Blinds

Roller Blinds

Bamboo Blinds

Roman Blinds

Austrian Blinds

Curtains

Cubicle Curtains

Folding Doors

Winter Garden Conservatories

Roller Shutters

Banners

Awnings & Canopies

ROLLER BLINDS

EASY AND ELEGANT

The SpringLock Roller Blind System were developed to provide excellent performance over a wide range of window blind sizes, fabric weights and fabric thickness. The manufacturing process does not involve the use of adhesives or sewing and always produces a clean and professional finish to the blind.

The two systems are designed for progressively larger and heavier blinds and the diameters of the sprockets for the control chains increase accordingly to enable larger blinds to be operated with the minimum physical effort. Each system is offered with a choice of metal or plastic control chain, blind specifiers have a choice of complementary systems when considering any commercial project.

SpringLock roller tubes and bottom bars are designed with patented longitudinal fabric fixing slots of varying widths. The manufacturing method used ensures that the fabric will remain firmly attached to the roller and will not become detached in normal use. The varying widths of the slots allow fabrics of various thickness to be accommodated easily. An added benefit of the slots is that they increase the rigidity of the tubes, enabling blinds to span wider openings without the risk of the tubes 'whipping' when the blind is operated. The same fabric location method is used for fixing the fabric to the bottom bar eradicating the possibility of loose fabric, producing a clean and professional to the blind.



The safety - first end cap locking system prevents the blind from coming out of its brackets if the blind is operated incorrectly. These end sets have mounting brackets which are truly 'universal'. They can be top face or side fixed and can be used for blinds with left hand or right hand controls. The ease of instantly switching end sets from one end of the roller to the other is an added benefit, plus the problems of having blinds supplied with the controls on the wrong side, or with the wrong brackets, are overcome.

Through vigorous testing we have established maximum recommended operating weights for each of our SpringLock systems. They provide a range which can handle the vast majority of applications. This allows specifiers the opportunity to choose the most suitable fabric weights and blind sizes without having to worry about system limitations.

SPECIAL FEATURES

- Integrated range of units to suit all applications.
- Patented safety - first end cap locking system.
- Spring loaded plunger for ease of installation.
- Option of metal or plastic operating chain.
- Universal fixing bracket colour keyed to the operating units.
- No sew no glue fabric location method.
- Choice of extruded aluminium bottom bar, exposed or concealed.

- Fully detailed performance information.
- Ultra smooth operation.

GENERAL APPLICATIONS

SpringLock systems 32 and 45 are suitable for use in any roller blind installation where reliability, operator ease of use and minimum maintenance are essential.

The integrated design features of SpringLock systems 32 and 45 make them particularly suitable for projects featuring a variety of window sizes used in differing applications.

A cassette spring unit is also available for system 32 applications where this is considered more appropriate.



SYSTEM 32	SYSTEM 45
TUBE	TUBE
100% Aluminium	100% Aluminium
5 Meter Lengths Maximum	5 Meter Lengths Maximum
32mm Out side Diameter	45mm Out side Diameter
1.05mm Wall Thickness	1.25mm Wall Thickness
4mm Fabric Location Slot/Strengthening Fins	4mm,4.5mm & 5.00mm Fabric Location Slot/ Strengthening Fins
BRACKETS	BRACKETS
White Painted / Steel Finish	White Painted / Steel Finish
Universal Fixing Points	Universal Fixing Points
20mm Wide Fixing Plate	20mm Wide Fixing Plate
49mm Height Fixing Plate	83mm Height Fixing Plate
63mm Projection	80mm Projection
OPERATING UNITS	OPERATING UNITS
CONTROL END	
Sprocket/Sprocket Guard Acetal	Sprocket/Sprocket Guard Acetal
Other Parts Mineral Filled Nylon or Nylon 6	Other Parts Mineral Filled Nylon or Nylon 6
SpringLock Friction System	SpringLock Friction system
Unique Bracket Securing Pin	Unique Bracket Securing Pin
Choice of Nylon or Metal Chain Drive	Choice of Nylon or Metal Chain Drive
IDLE END	IDLE END
Nylon 6 Construction	Nylon 6 Construction
Spring Loaded Action for Ease and Security of fixing	Spring Loaded Action for Ease and Security of fixing
MAXIMUM RECOMMENDED OPERATING WEIGHT	MAXIMUM RECOMMENDED OPERATING WEIGHT
2.25kg(5ibs)	11kg(24ibs)

FABRICS

A wide selection of fabric is available including Transparent, Dimout, Blackout, Sun Screen, PVC free etc. These fabrics are highly technical, having solar optical properties such as control over light, heat and uv etc. These fabrics are certified for maintaining indoor air quality, creates a healthy environment.

We do have fabrics with Anti-Bacterial and Anti-Fungal properties, highly recommended for Patient Rooms and Educational Institutions.

The fabrics are flame retardant as well and comply with some or all of the following standards.

NFPA 701-99, M1, BS, FR, B1 etc.

MAINTENANCE

Side control Roller Blind systems are made in corrosion resistant materials, mostly with plastic, aluminium and steel and are expected to prevent any problems if used under normal circumstances in non-corrosive environments. The methods of construction minimize damage caused by operator misuse. Any damage which may occur can normally be rectified easily on site.



WOODEN BLINDS

HARMONY, THE NATURAL WAY

Naturally beautiful. Lasting classic quality. It's man's oldest building fabric and a traditional material; wood has great visual appeal and warmth. Royal Blinds presents, for a design conscious person, an outstanding opportunity to use its "wooden shades" as major element or interior design.

The wood blind colour range has now grown, and is available in both 25mm and 50mm slat widths. They are available in a range of traditional light and dark wood tones. The stains highlight the natural grain patterns of our wood and feature a lustrous finish.

A UNIQUE COMBINATION

- Helps keep your winters warm and summer cool
- Lacquered after stain to reduce the maintenance
- Minimize fading (UV protective top coat)
- Valance options
- Exclusive "corner cut" for distinctive finish

VARIOUS TYPE OF CONTROL

- Can be tilt opened and closed with standard manual control
- Specialty blinds can also be raised and lowered
- Remote or switch activated motorized control that tilt or raise the blinds



FEATURES

- Color coordinated ladders and cords
- Control location options
- Easy to clean
- Consistent quality and moisture proof
- Choice of controls: left tilt, right tilt or reverse
- Standard and custom crafted sizes to meet your requirement
- Hand assembled and carefully inspected
- Slats are precisely cut from 100% bass wood
- Limited lifetime warranty on both wood slats and components
- An exclusive extruded steel head rail is designed to support wood blinds for years and will not twist, sag or corrode
- A variety of horizontal slat sizes: 1" and 2" (some shapes are best accommodated by specific slat size)
- Optional crown molded and beaded valances are also available
- End and route holes are completely sealed during the finishing process, drastically reducing the chances of wrappage.





VENETIAN BLINDS

THE HORIZONTALS

Venetian Blinds are now in vogue. A great many beautiful homes and offices stand as testimonials in the region. Royal Blinds offer custom crafted “Venetian Blinds” in a variety of exciting colors.

VARIOUS TYPES OF CONTROL

- **Normal:** controlled by a lateral pull cord and wand to rotate the blinds
- **Mono:** controlled by a chain to lift and tilt
- **Motorized:** remote controlled and effects perfect rotation and traversing of the louver blind. It also has a timer

FEATURES

- **Durable:** engineered to give dependable, trouble-free performance far longer than most other types of shading devices
- **Low Cost:** lower than draperies and most other types of window coverings. In addition, aluminium blinds are economical to maintain
- The raw materials and motor are imported from US and Europe

Double Glazing: These blinds are the sing of most advance and sophisticated office system. The blind is placed between two glasses. Double glazing Blinds are ideal for partitions within the room. It gives very aesthetic and neat image. These are available in two operating Systems: Knob system and wand & pull cord system, where the wand helps to tilt the blind and the pull cord helps to lift the blind. The systems can be locked at a desired stop.

Steel Channel Head Rail: Royal mini blinds head rail, “U” shaped 24 x 26 mm deep channel, fabricated 0.024” thick (before coating) phosphate treated steel with rolled edge at top with a prime coat of vinyl primer and finished coat of polyester baked enamel to match bottom rail and end support brackets, to tone with slats. Head rail shall be roll-formed coating.

Bottom Rail: The bottom rail shall be oval in 0.024” thick (before coating) phosphate treated steel with prime coat of vinyl primer and finish coat of polyester baked enamel matching head rail and coordination with coating. Thermoplastic protective caps in bottom rail shall be used to secure ends of braided ladder and

cords to assure window sill protection. Thermo plastic end plugs shall accept hold down bracket pins.

Slats: Aluminium alloyed for maximum strength, flexibility and resistance to corrosion, normally 25mm wide. Pre-coating treatment is done to bond the polyester with enamel finished coating. A properly formed contour creates the finished crown with corner of 3/16" tangent to edge of slat. The end clearance of each slat shall not exceed 1/4" from each side of the window opening from jamb by 1.5" maximum, of each end where possible. Slats thickness and ladder support distances shall be such that there is no visible sag. Slat is available in 0.18mm and 0.21mm thickness. Slats are available in Plain Finish, perforated and also wood imitated.

Cord Lock: Snap-in design and incorporated with a stainless steel wear guard over which cords pass and a floating shaft type locking and offer minimum wear to cord. A "crash-proof" safety feature that shall lock blinds automatically upon release of cord. End of lift cord is treated with a plastic tassel.

Shaft Type Tilter: Tilter is a worm and gear arrangement in a totally enclosed gear case (housing). The worm (tilter shaft) shall be steel with the gear of nylon and gear housing acetal thermoplastic. The tilter is designed for smooth friction operation and shall hold slats at any angle with no movement of slats due to vibration. Tilter shall be a snap-in component allowing for field removal if required.





VERTICAL BLINDS

SOPHISTICATED BEAUTIES

Royal Vertical Blinds, the most sophisticated and versatile of all our blinds. They are truly advanced in quality and are available in luxurious fabrics: cotton and polyester; fiber glass; vinyl and PVC (plain and perforated). These are available in two louver widths: 89mm and 127mm. Royal vertical blinds are fashionable and affordable and can remain beautiful through years of heavy use.

FEATURES

- **Durable:** The louvers are stable, unshrinkable and will not stretch
- **Affordable:** Besides offering full appearance and excellent coverage of drapes, they also make good your dry cleaning bills
- **Additional Protection:** They provide a comfortable indoor ambience because of their insulating qualities. A wide range of flame retardant fabrics are available.
- **More Privacy:** They rotate to give you more privacy and light control than any other window treatment

IMPORTANT CONSIDERATIONS:

- **Determine the system model:**
- Based on the shape of the window. Royal Blinds offers several solutions for all window shapes
- Based on degree of convenience. Royal Blinds offers the right solution for all degrees of comfort and convenience.
 - Cord pull with cord traverse and bead chain rotation
 - Single control for both traverse and rotation
 - Fully motorized operation
- Based on your personal taste preferences
- **Determine the design of system:** They are determined by the method of stack (draw) and by the type and location of the control elements
- **Determine the installation method:** Vertical Blinds can be ceiling or wall mounted

PRODUCT DESCRIPTION

The versatility of systems ranges from functional to exclusiveness

Head Rails

Fully enclosed drives and flush end caps provide a secure fit and clean, finished appearance.

A rack and pinion gear system that allows louvers to rotate smoothly and easily. Centrally located carriers stems make the head rails reversible for right or left installation. The clear, nylon stems are nearly invisible, yet extremely strong and have low-friction wheels that allow the blind to be opened and closed with ease.

The track measures 45mm in width and 33mm in height, with an average wall thickness of 0.050 inches and made of clear anodized aluminium alloy 6063-T5 also available in powder coated RAL 9010 finish. Each vane shall be supported by a low friction thermo plastic carrier with traverses on rolling acetal wheels. Each carrier contains a friction clutch mechanism designed to prevent damage to the vanes or the carriers when overloaded.

Rotation of vanes shall be provided by pulling a #10 plated steel or PVC bead chain loop. A tilt rod passes through each carrier and imparts rotation via to each carrier gear to each carrier hook in unison. A direct drive mechanical advantage resulting in smooth rotation is provided by a large sprocket wheel in the molded acetal control unit.

Spacing of vanes for any opening is achieved by nylon spacer shims which lock into the body of the carriers to provide a continuous

linkage. Traversing is achieved by means of a continuous nylon traverse cord attached to the master carrier and traversing over acetal pulley wheels supported in acetal end caps. Blinds may traverse left to right, right to left, or may be of a split draw centered or otherwise specified. Tension shall be maintained on this cord by a weight in a plastic housing.

Vanes shall be as selected from Royal vane material selection binder. Intermediate support brackets shall be furnished for blinds over 46 inches wide with 36 inches of maximum spacing. Optional extension brackets are also available.



ROMAN AND AUSTRIAN BLINDS

GUIDE TO BEAUTIFUL WINDOWS

Functional Roman Blinds are introduced by Royal Blinds in UAE market. The system of Blinds is imported from Europe.

ROMAN BLINDS

- Available with two operating systems.
- Manual cord and chain operated.
- Motorized switch and remote control operated and more
- Easy to make and install.
- Can be made with any non shrinkable fabric.
- In harmony with the interiors.
- Economical compared to traditional curtains
- Washable
- Standard and custom crafted designs to meet your requirements



AUSTRIAN BLINDS

- Available with two operating systems
- Manual only chain operated
- Motorized switch and remote control operated and more
- Elegant, beautiful and glorious looking.
- Fabric available with fire retardant coating
- Can be made with any non shrinkable fabric

FEATURES

- Shade components are made of aluminium and plastic
- Heavy duty aluminium head rail with Velcro inserted and had an approximate weight of 377 gm/mt.
- Plastic components consist of acetate resin which are resistant to friction and to external conditions like heat, cold, humidity and direct sunlight.



SPECIAL SHADING SYSTEMS

BEAUTIFUL SOLUTIONS FOR YOUR ROOFTOPS

Wintergarden, atrium, bent or straight – a made-to-measure Royal Blinds Special Shading system is the solution for any kind of requirements and shapes. Its variability as well as its high grade comfort, functionalism and durability make our special shading solutions a first class choice.

WINTER GARDEN SYSTEM

- Available with two operating systems.
- Manual cord and chain operated.
- Motorized switch and remote control operated and more
- Easy to make and install.
- Can be made with any non shrinkable fabric.
- In harmony with the interiors.
- Economical compared to traditional curtains
- Washable
- Standard and custom crafted designs to meet your requirements




Optimal solutions for special requirements

Where conventional shading systems encounter limits, our special shading systems offer surprising and decorative solutions, either for wintergardens, domelights or other large-scaled areas.

In addition to this multi-bents from a minimum radius of 350 mm are possible. The fabrics - based on solid aluminium rails - are being moved by a punched or toothed and UV-resistant plastic transportation tape. Even really heavy fabrics can be moved steadily and quiet because of silent runners with turnable loops. The blinds can be produced in one, two or more parts. And also mounting of this system is pretty easy – due to locking bolts, drilling is not necessary.

For electric operation you can choose between three different synchronous single or tandem motors with only 30, 45 or 65 W – each type with switch-off – as well as a high-speed motor which moves the drapery in 190 mm/sec. instead of usually 130 mm/sec. All systems can be equipped with radio remote control and are CE proved.

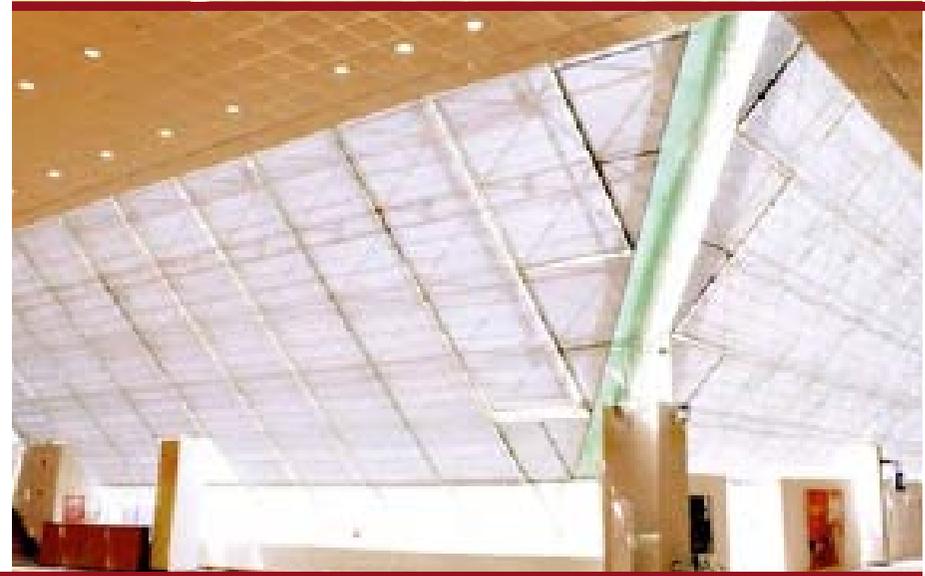

DIFFERENT SHADING TYPES

Wintergarden Shading System 5066



[more](#) 

Ceiling System 5070



[more](#) 

Wire Guided Large Area Shading System 5072



[more](#) 

Driel and Dome Shading System 5080



[more](#) 

Counter-Pull Roller Blind 5090




[more](#) 


Pyramid Shading System 9000



[more](#) 

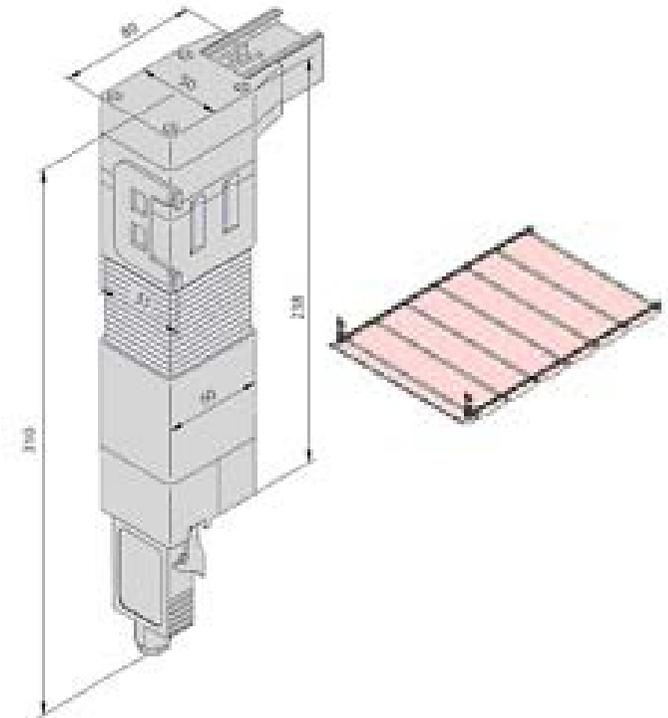

Options are available for a Manual operation, by chain, to operate within the limits.



RAIL

width 32 mm, height 26 mm
made of extruded aluminium AlMgSi 0.5 F22
technically anodized as per E6/EV1 or white
powder coated according to RAL 9010
plastic parts either white or grey



TRANSPORTATION TAPE

punched/toothed belt with special contour
and coating constant length and resistant to
wear very smooth and calm run

MOUNTING

easy and quick mounting with locking bolt
ceiling mounting with adjustable mounting
angles

More details about the products are available
on request.



PANEL BLINDS SYSTEMS

THE TRENDY LINER SHADE

Thanks to its linearity. Royal Panel Blinds System is the ultimate solution for creating modern furnishing impressions in harmony with the environment. Panel fabrics of 40-70 cm width are suspended from slides running inside the tracks of various channels.

The panel blinds can be operated in different ways, either by pull or by cord. Fabrics for panel are kept tightened by an aluminium plate inside a pocket. Together creating modern furnishing impressions.



FABRIC STOP

A pressure fabric stop grants higher elegance to the system avoiding the unaesthetic “dog-ears” always forming as the ends of panel fabrics

SPECIFICATIONS

Royal Panel Blinds Systems complete and assembled comprise of 2, 3, 4 and 5 channel track sof 31mm, 49.5mm, 68mm and 86 mm.

It has also a Velcro-coated PVC trailer section of 4m length which comes along with a weight bar.

It comprises of all necessary fittings to provide a fully working panel system. Widhts of fabrics can be varied but is normally between 50-100 cm for flexibility and an overlap of 10cm -15cm is needed.

Profile ratio is 1:1 and each system is built from the four different profiles available

Product Information

Royal Panel Blind is a unique system of sliding panels for use as a window or wall dressing or room divider. Panels can easily be removed for cleaning or to change décor.

Stacking Variations

It is arranged to stack right hand single/left handed single/pair/ centre stack cord/hand, with fabric.

For Single Stack System

(i.e., where all panels stack together at one side or in the middle)
One channel is need for each panel.

For Pair Stacks


One channel is needed for every two panels, plus one extra for the system



FOLDING DOORS

THE PROFESSIONALS' CHOICE

Royal Blinds, the UAE's exclusive manufacturer of window treatment solutions present PVC folding doors with genuine quality. These doors are excellent for creating partitions and offer total privacy. Besides, they can make existing space more useable since the entire unit is contained within the door frame itself. Royal Blinds PVC folding doors preferred by the professionals of the industry.

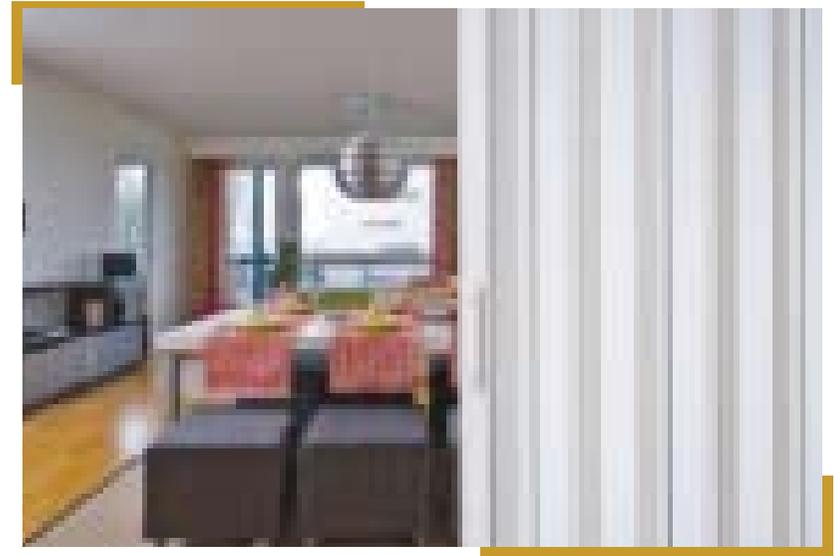

FEATURES

- **Durable:** made of hard PVC material
- Affordable, fire retardant and washable
- Solutions for space management
- Can create total privacy economically
- Low maintenance, easy to install and operate
- Shades in harmony with your interiors
- Materials are pre-tested for temperature resistance and acclimatized to tolerate the extreme climatic conditions
- Helps in controlling the air conditioning losses
- Any width available in standard heights
- Water and weather resistant

OPTIONS

- Plain finish
- Lock with handle or just magnetic catcher
- Bottom guide rail



CUBICLE TRACKS

INNOVATIVE PRIVACY

Hospital Tracks

Royal Blinds offers high quality customized cubicle curtains for hospitals, clinics, care centers, physical therapy centers.

With a wide variety of fabrics available, we are sure to brighten your facility with attractive curtains that will enhance your patient's improvement.

Tracks can be either ceiling mounted or wall mounted easily with unique brackets that give solid support. These are made of extruded aluminium that gives durability to the track with a low profile of only 34mm in height.



- These tracks can be bend into a variety of shapes to fit any difficult area.
- Attractive contemporary rounded profile shape whilst system enjoys all the flexibility and strength.
- Available as standard in silver, cream, white, chrome, gold, gun metal and black.
- Special custom coloring facility for this profile and components enables specifiers to select and RAL color to complement or contrast with décor.
- Quick release safety device is available through distributors for high risk areas.
- Clean unbroken line in hospital wards.
- The top channel maximizes connection positions and suspensions variations. The dust-cover strip reduces the risk of cross-infection.
- Standard length 6m.





CURTAIN AND SHEERS

ENHANCE THE ENVIRONMENT

Royal Blinds Curtains are tailor-made and are available in manual and motorized option for various projects such as hotels, hospitals and corporate. The curtains have extruded aluminium tracks, unique featured Fabrics of high quality

COMFORT MEANS THE UTMOST SERVICE FOR THE USER

The different variations offer a lot of possibilities how to divide the curtain. You may choose between a one part curtain with stack at the left side or at the right side, curtains in two parts or even with several parts, closing in the middle or aside – everything is possible. With the curtain track system, you will find a perfect solution for any situation at site. The system is also available with bent rails with a bend radius of only 350 mm.


POWERFUL IN LENGTH AND IN WEIGHT

Our curtain tracks are going further and exceed normal limits of curtain tracks easily. With our system 5060 curtains up to a length of 21 m and a weight up to 90 kg are smoothly and silently moved by the electric drives. But also curtain tracks with manual operation and ball chain achieve a length up to 7 m and a weight up to 20 kg – easy comfort in every situation! The

traction is done by a highly flexible punched/toothed belt, free of stretching and fitted with a special coating which guarantees a very smooth and wear-resistant gliding even in curved rails. The transport of the curtain is done by a very solid, stainless steel traverse joint which is large enough to guarantee an optimal overlap of the curtains. Runners with steel axle carry and track even heavy curtains with the greatest of ease.



The Optimized motor power leads to an optimized exploitation in proportion to the size of curtain. The power graduation of our low noise synchronous motors with either 30, 45 or 65 watt offers the adequate drive for every kind of curtain. Speed versions of the motors with a low velocity of 190mm per second reduces the tracking time especially in case of long lengths of curtains and are thus another asset of this perfect system.



RAIL

width 32 mm, height 26 mm,
made of extruded aluminium AlMgSi 0.5 F22
technically anodized as per E6/EV1 or white
powder coated according to RAL 9010
plastic parts either white or grey



Transportation tape

Punched /Toothed belt with special contour
and coating, constant length and resistant to wear
very smooth and calm run




Drive runner

drive runner wear-resistant plastic slides
special steel traverse joint, safety clip,
curtain overlap 180 mm



Runner

rollers with turnable grommets and galvanized
steel axle special running wheels guarantee
a smooth run per m of rail 10 rollers with
clamping hook



Mounting

easy and quick mounting with locking bolt
wall mounting with adjustable mounting angles

Manual operation per endless bead chain,

simply attachable to the rail gear by bayonet joint and electro
control via pushbutton switch or radio remote control or more



BAMBOO BLINDS

UNPARALLELED EXPERIENCE

Nothing can match the beauty of natural bamboo, wood and reed. This has been proved since ages. Royal Blinds, the UAE's exclusive manufacturer of window treatment solutions presents premium "Bamboo Blinds", an unparalleled experience in this region.

LIFT AND LOCK SYSTEM

A fully tested lift and locking system ensures easy and consistent operation for the life of product. The roman-style lift system creates uniform folds that, when the shade is in the fully raised position, forms the appearance of a decorative valance.



FEATURES

- Attractive looks and easy to maintain
- Natural elements: basswood, and bamboo. The woven matting are imported from the Far East
- Aesthetically appealing and classi
- Creates a natural environment
- Easy to clean
- Standard and custom crafted designs and sizes to meet your requirements
- Hand assembled & carefully inspected

Royal Bamboo Blinds are available as both flat roller and Roman-style shades and can be installed either inside or outside the window frame.

Based on your personal preference you could opt for the manual or the fully motorized option



DUBAI: FACTORY & HEAD OFFICE | T. +971 4 3474760 | F. +971 4 3474780 | ABU DHABI: T. +971 2 6789877 | F. +971 2 6789892